


# RECTANGULAR INSPECTION PORT

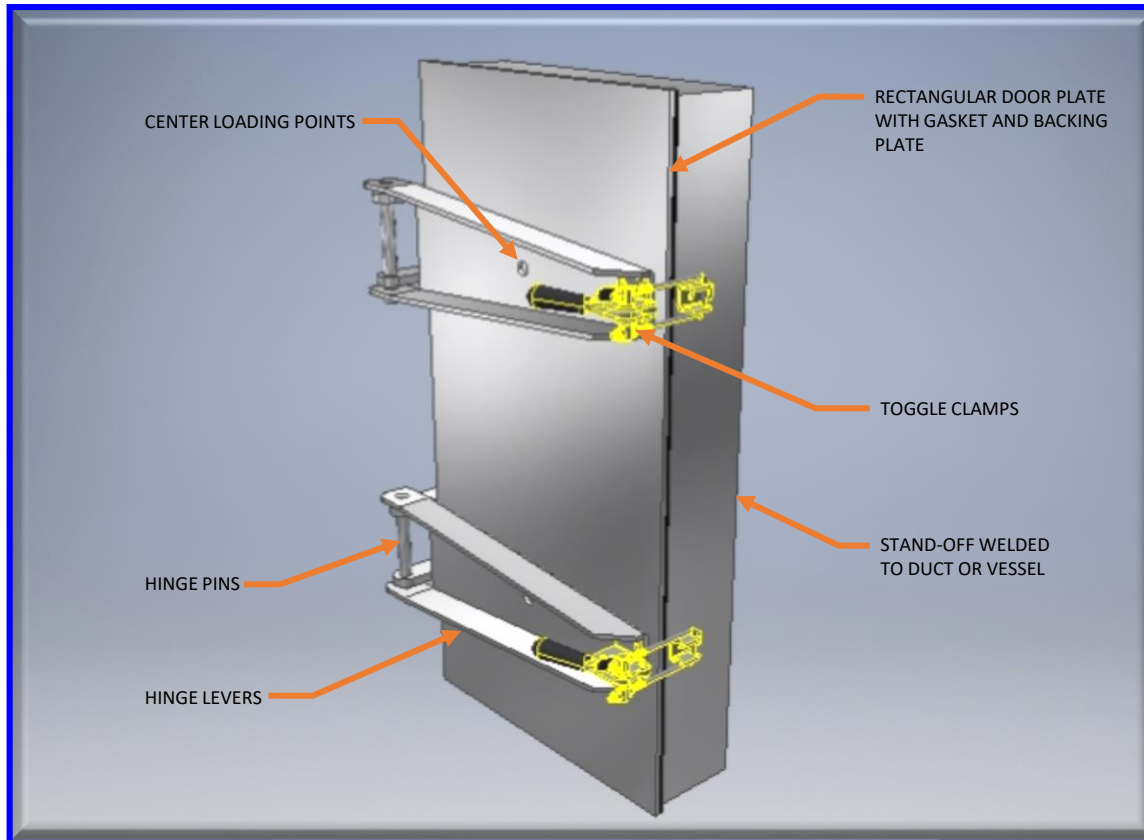

## Application:

- Suitable for mounting on ducting or equipment for various types of ventilation systems
- Standard sizes: 12"X24", 18"X36", 24"X48"
- Working pressure: up to 20 inWC

## Features:

- Gasket (neoprene, EPDM, or silicone)
- Tight-sealing center-loading door
- Hinged levers with heavy-duty toggle clamps
- Available in stainless steels or painted carbon steel

## Benefits:

- Simple, reliable, and easy to maintain
- Heavy-duty construction

## How it works:

- The door is loaded at two locations near its center
- The gasket is loaded evenly on the perimeter of the door to achieve a watertight seal

