


BOLTED INSPECTION PORT

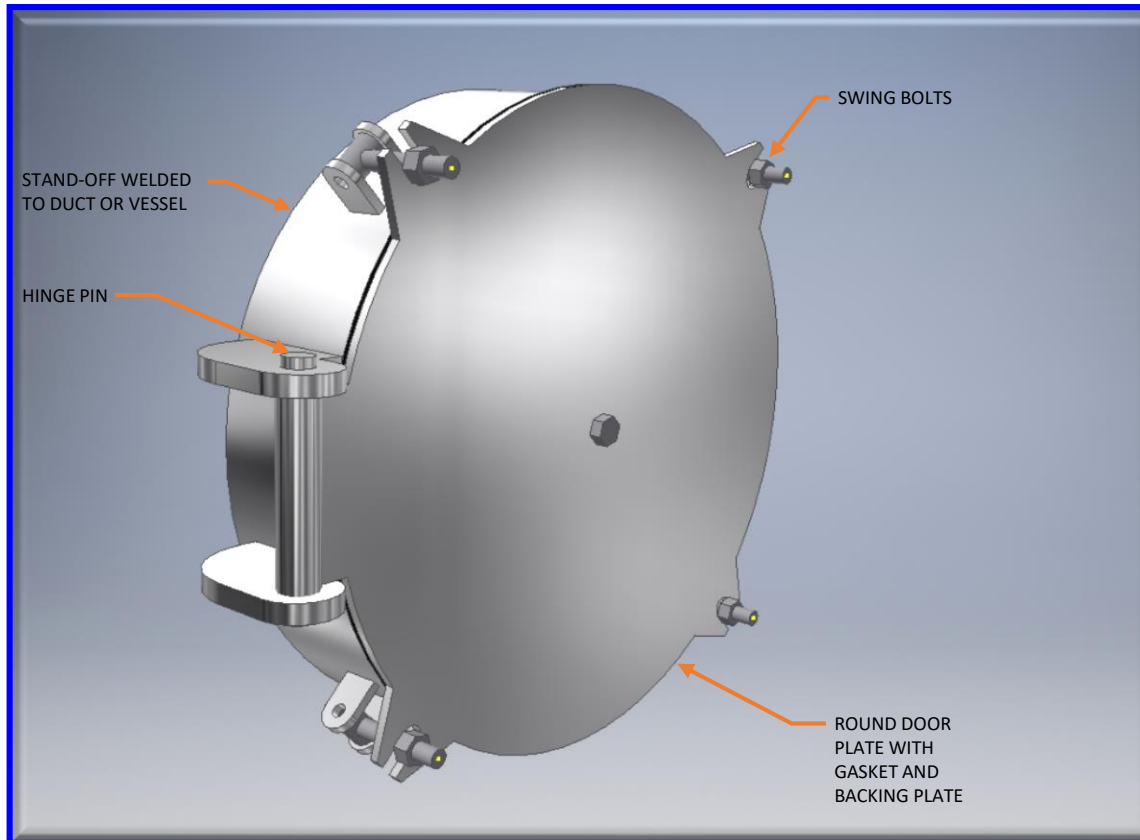

Application:

- Suitable for mounting on ducting or equipment
- Standard sizes: 12"Ø, 18"Ø, 24"Ø
- Working pressure: up to 80 inWC

Features:

- Gasket (neoprene, EPDM, or silicone) sandwiched between outer door plate and inner liner plate
- Tight-sealing
- Hinged plate with heavy-duty perimeter swing bolts
- Available in stainless steels or painted carbon steel

Benefits:

- Simple, reliable, and easy to maintain
- Heavy-duty construction

How it works:

- The door gasket is loaded evenly on it's perimeter to achieve a watertight seal



**Engineering
Alliance**